




# 632 SERIES

Series 632 panels offer a wide choice of finish options, accessories, and sound control levels.

## PAIRED PANELS

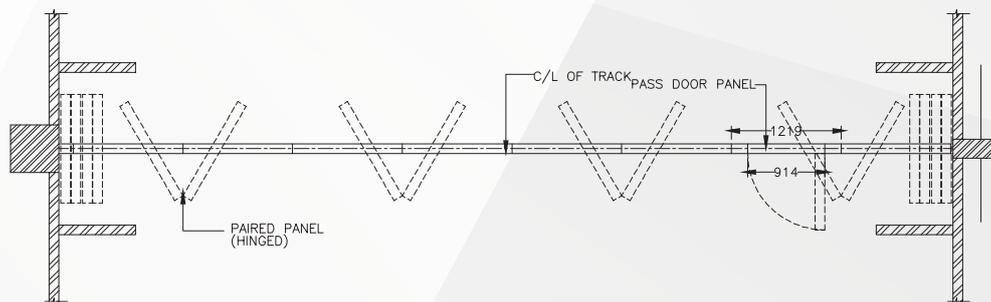

Select for wall-to-wall space division. Panels are hinged in pairs allowing fast setup. They may be stacked at either or both ends of the track or in a "pocket". One or more pair of panels may also be placed anywhere along the track for use as sight dividers.

The panels are nominally 3" [76] thick and have a welded frame of 16 ga. steel. The retractable seals are Quick-Set™ which means they are easily extended or retracted with only a 1/2 turn of the removable handle. The face substrate varies by the level of sound control required (STC rating).

**Top Supported  
Center Stack  
Paired Panels  
Manually Operated  
Maximum Opening Height:  
24'3" [7391]  
Maximum Opening Width:  
Unlimited  
STC Ratings: 41, 43, 47, 49, 51**

## Available Accessories/Options

- **Pass Door Inclusion Options** – Exit signs, Automatic door closers, panic hardware, locks, frame and prep for window, peep viewer
- **Pocket Doors for Partition Storage** – factory-finished or field-finished
- **Work Surface** – Inset or full-height dry erase steel marker boards, inset porcelain enamel steel dry marker or chalkboard, eraser pocket or tack boards
- **Acoustic Baffle**

## Suspension Systems

For panels weight up to 900 lbs (409kgs) track shall be of clear anodized architectural grade extruded aluminium alloy 6063-T6.

## Trim Colors - standard

Available in three standard trim colors - lamb's wool, Brown or Gray. Custom colors for metal trim are also available for an additional charge.


## "Standard" Product Features and Benefits:

- Feature:** Protective vertical trim (Available option: no protective vertical face trim.)  
**Benefit:** Trim protects the panel edges and faces plus it provides a handhold when moving panels.
- Feature:** Quick-Set™ Retractable Seals.  
**Benefit:** The retractable seals are Quick-Set™ which means they are easily extended or retracted with only a 1/2 turn of the removable handle. No tedious cranking needed to set the seals.
- Feature:** 2" [50] retractable bottom seals  
**Benefit:** Retractable seals accommodate out-of level floor conditions. When retracted, nothing drags on the floor when the panels are moved. Panels can be "locked" in place.
- Feature:** Retractable bottom seals exert downward seal force  
**Benefit:** Provides constant force against floor for optimum acoustics even on carpet or other porous floor materials. Maintains panel stability when the seals are set.
- Feature:** Waist high seal activator for quick set retractable seals.  
**Benefit:** Fast, easy seal activation without bending or stooping.
- Feature:** Removable operating handle.  
**Benefit:** Prevents unauthorized operation.
- Feature:** Expanding Jamb Closure (Lever Closure) Panel  
**Benefit:** Exerts 250 lbs [113.4 kg] of force against the fixed wall. The compression creates tight panel joints for optimum sound control.
- Feature:** Interlocking vertical seals  
**Benefit:** Ensures panel-to-panel alignment and prevents sound leaks between panels.
- Feature:** Low profile hinges  
**Benefit:** Safety and aesthetics - no unsightly hinges protruding from the panel faces.

### Finishes:

#### Face finish shall be:

- Factory applied reinforced vinyl/fabric with woven backing.
- Optional:
  1. Customer Selected
  2. Unfinished for field decoration.
  3. Wood Veneer
  4. High pressure laminate

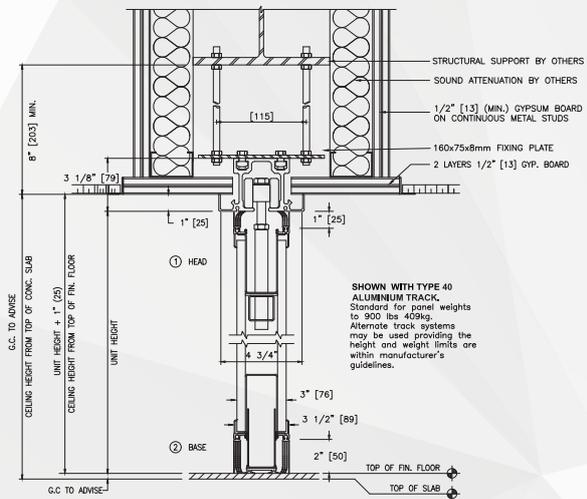

VERTICAL SECTION 632 SERIES  
SCALE: N.T.S.

