





633 SERIES

Series 633 panels offer a wide choice of finish options, accessories, and sound control levels.

MANUALLY OPERATED, CONTINUOUSLY HINGED (TRAIN) PANELS

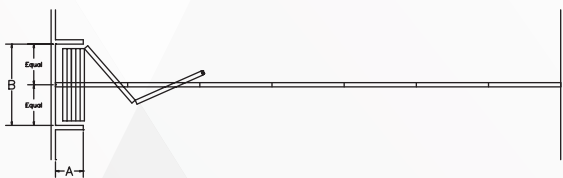

SINGLE OPENING

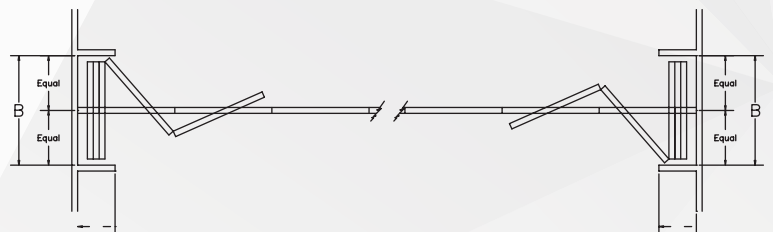

BI - PARTING (OPTIONAL)

The panels have a steel frame, full height vertical edge protection, a selection of acoustic ratings, continuous contact top and bottom seals, and are a nominal 3-1/2" [89] thick. Select for wall-to-wall space division. Panels are hinged together and are manually moved across the opening.



HUFCOR[™]
shaping your experience

Top Supported, Center Stack Continuously Hinged Panels Manually Operated

Maximum Height: 12'3"
[3.7m]

Maximum Opening Width:
40'5-1/2" [12.33m]

STC Ratings: 41, 43, 47, 49, 51

Available Accessories/Options

- **Pass Door Inclusion Options** – Exit signs, Automatic door closers, panic hardware, locks, frame and prep for window, peep viewer
- **Pocket Doors for Partition Storage** – factory-finished or field-finished
- **Work Surface** – Inset or full-height dry erase steel marker boards, inset porcelain enamel steel dry marker or chalkboard, eraser pocket or tack boards
- **Acoustic Baffle**

Trim Colors - standard

Available in three standard trim colors - lamb's wool, Brown or Gray. Custom colors for metal trim are also available for an additional charge.

"Standard" Product Features and Benefits:

Feature: Protective trim

Benefit: It protects the panel edges and faces.

Feature: Carrier on each panel

Benefit: Holds the weight of each panel and ensures smooth even operation. No rub or guide rails required.

Feature: Low profile hinges

Benefit: Safety and aesthetics - no unsightly hinges protruding from the panel faces.

Feature: Interlocking vertical seal

Benefit: Prevents sound leaks between panels.

